

产品概述|Product Overview

产品系列 Product Model	车灯 Head lamp	前雾灯 Front fog lamp	昼行灯 DRL	转向灯 Turn signal	刹车灯 Stop lamp	后雾灯 Rear fog lamp	倒车灯 Backup lamp	仪表盘灯 Dashboard lamp	工作灯 Working light	氛围灯 Atmosphere lamp
C7025K15W-12B2C2 (Ra1) -FC-CZ	■									
C5325K15W-9B1C3 (Ra1) -FC-CZ	■									
C6530F35W-15B1C5 (Ra1)-FC-LVR-CZQ	■									
C5050K9W10BB-12B2C2 (Ra1) -FC-CZ	■	■								
C5050K11W10BB (Ra1)-FC-CZ	■	■								
LC020K15W-9B1C3 (Ra1) -FC-CZ	■									
C2016F77W2CB (Ra1) -FC-LVR-CZQ	■	■								
C2016K9W3CB (Ra1) -FC-CZ	■	■								
A-2835H421WY-S1-08-CZ				■						
C2016F77W2CB-FC-LVR-CZQ				■						
3528D34WY-S1-08-PCT-CZ				■						
3433WY				■						
A-3528U51FC-S1-13-CZ					■	■				
C2016F14R2CB-LVR-CZQ					■					
3433R					■					
A-2835D1W-S1-08-HR1-CZ				■			■			
C2016F77W2CB (Ra1) -FC-LVR-CZQ				■			■			
3433Y				■						
AS-3528D34W-S1-08-PCT-CZ				■						
PC-3216H233W-CZ								■		
PSC-2012H233W-CZ								■		
PC-3216H203BC								■		
PC-3216U51GC								■		
PSC-2012S9AC-CZ								■		
C2525F82W3EA (Ra1) -FC-CZ									■	
C3535F35W3AB (Ra1) -FC-CZ									■	
AA-2810U38FC-D-CZ										■
AA-2810U51GC-D										■
AA-2810H203BC-D										■



Official website
官方网站



Official wechat
官方微信

鸿利智汇集团股份有限公司
Hongli Zhihui Group Co.,Ltd

广州-国内销售部 电话: 020-86733911 传真: 020-86733883 邮箱: hongli@honglitricon.com
International sales department Tel: +86-20-8673 3333 ext 3033 Fax: +86-20-8673 3883 E-mail: fair@honglitricon.com

深圳-直销中心 浙江-直销中心 江苏-直销中心 福建-直销中心 四川-直销中心
电话: 0755-29820666/29820555 电话: 0571-87684006 电话: 0512-69591982 电话: 0592-5912521 电话: 023-68915306
传真: 0755-28093452/28093913 传真: 0571-87550593 传真: 0512-69591151 传真: 0592-5912531 传真: 023-68546225

Add: No.1, Xianke yi Road, Huadong Town, Huadu District, Guangzhou City.
广州市花都区花东镇先科一路1号



鸿利智汇集团
股票代码: 300219

LED车用光源领导品牌
We are leading the automotive lighting



质量管理 QUALITY CONTROL

TS16949质量管理体系、VDA 6.3德国汽车标准——公司坚持生产高品质的车载光源产品, 部分产品通过AEC-Q 101 可靠性要求, 可满足中国GB标准、欧盟ECE法规、美国SAE标准。

TS16949 quality management system / VDA 6.3 German automotive standard——We are supplying innovative and high-quality automobile-mounted lighting products, some products have passed AEC-Q 101 reliability test and meet GB(China), ECE(EU) and SAE(United States) standards.

产品优势 PRODUCT ADVANTAGE



高可靠性
High reliability

Flipchip 相变共晶技术, 能满足高端汽车使用
Flipchip Phase-change Eutectic Technology, it can meet the requirement of high-end cars.



缓冲应力
Buffer stress

抗冲击性、抗震性非常好, 能够很好地适应各种环境
Excellent impact resistance and seismic resistance, it is well adapted to a variety of environment.



满足线性要求
Meet the requirements of the linear

尺寸更小、可灵活改变造型, 完美契合汽车线性要求
Smaller size, flexible design. It perfectly meets the car linear requirements.






快速启动
Quick start

灯珠在微秒级别中启动, 具有更高的反应速度
Light component start in microsecond level with fast response.



车用照明产品目录

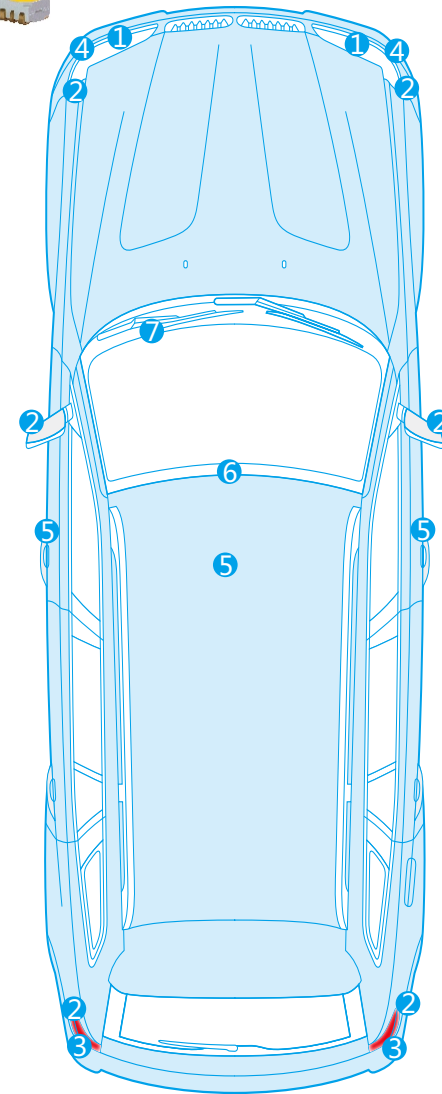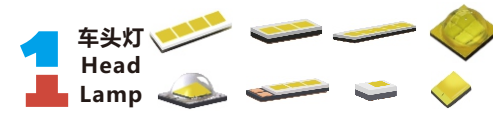

车头灯 Head Lamp

	C7025K15W-12B2C2 (Ra1) -FC-CZ	C5325K15W-9B1C3 (Ra1) -FC-CZ	C6530F35W-15B1C5 (Ra1) -FC-LVR-CZQ	C5050K9W10BB-12B2C2(Ra1) -FC-CZ	C5050K11W10BB (Ra1) -FC-CZ	LC020K15W-9B1C3 (Ra1) -FC-CZ	C2016F77W2CB (Ra1) -FC-LVR-CZQ	C2016K9W3CB (Ra1) -FC-CZ
Rated Current@ Recommend Power	2.0A@15W	1.0A@10W	1.0A@15W	1.5A@10W	2.4A@7W	1.0A@10W	0.5A@1.5W	1A@3W
Max Current@Max Power	3.2A@20W	1.6A@15W	1.5A@22W	2A@12W	3A@10W	1.6A@15W	0.7A@2W	1.5A@5W
Product Dimension(mm)	7.0*2.5*0.75	5.3*2.5*0.75	6.5*3.0*0.75	5.0*5.0*2.91	5.0*5.0*2.91	7.0*3.0*0.75	2.0*1.6*0.75	2.0*1.6*0.75
CCT(K)	5665-6530	5665-6530	5180-6680	5665-7040	5665-7040	5310-6020	5180-6680	5665-6530
Flux(lm)	1200-1400	900-1100	1150-1450	1300-1500	650-850	900-1100	220-260	300-360
Voltage(V)	5.6-6.6	8.4-10	14-17	5.6-6.6	2.9-3.5	8.4-10	2.8-3.3	2.8-3.3

氛围灯 Atmosphere Lamp

	AA-2810U38FC-D-CZ	AA-2810U51GC-D	AA-2810H203BC-D
Rated Current@ Recommend Power	0.02A/0.06W	0.02A/0.06W	0.02A/0.06W
Max Current@Max Power	0.03A/0.09W	0.03A/0.09W	0.03A/0.09W
Product Dimension(mm)	2.8*1.0*1.2	2.8*1.0*1.2	2.8*1.0*1.2
CCT(nm)	617-627	515-525	464-474
Flux(mcd)	460-700	460-800	160-350
Voltage(V)	1.8-2.4	2.8-3.4	2.8-3.4

转向灯 Turn Signal

	A-2835H421WY-S1-08-CZ	C2016F77WY2CB-FC-LVR-CZQ	A-3528D34WY-S1-08-PCT-CZ	3433WY
Rated Current@ Recommend Power	0.06A@0.18w	0.5A@1.5W	0.15A@0.5W	0.14A@0.5W
Max Current@Max Power	0.07A@0.21w	0.7A@2W	0.18A@0.6W	0.15A@0.5W
Product Dimension(mm)	3.5*2.8*0.7	2.0*1.6*0.9	3.5*2.8*0.8	3.4*3.3*1.9
Chromaticity coordinate	(0.57,0.41)	(0.57,0.42)	(0.57,0.41)	(0.57,0.42)
Flux(lm)	17-22	40-60	40-55	15-25
Voltage(V)	2.8-3.4	2.8-3.3	2.8-3.4	2.8-3.3

刹车灯 Stop Lamp

	A-3528U51FC-S1-13-CZ	C2016F14R2CB-LVR-CZQ	3433R
Rated Current@ Recommend Power	0.02A@0.04W	0.5A@1.5W	0.14@0.5W
Max Current@Max Power	0.03A@0.06W	0.7A@2W	0.15@0.5W
Product Dimension(mm)	3.5*2.8*1.3	2.0*1.6*0.9	3.4*3.3*1.9
Dominant Wavelength(nm)	617-627	617-627	617-627
Flux	780-1000(mcd)	40-60lm	15-25lm
Voltage(V)	1.8-2.4	1.75-2.75	1.75-2.75

工作灯 Working Light

	C2525F71W3EA (Ra1) -FC-CZ	C3535F35W3AB (Ra1) -FC-CZ
Rated Current@ Recommend Power	0.35A@1W	1A@3W
Max Current@Max Power	0.50A@1.6W	1.2A@4W
Product Dimension(mm)	2.45*2.45*1.85	3.45*3.45*1.9
CCT(K)	5665-7040	5665-7040
Flux(lm)	110-140	250-280
Voltage(V)	2.8-3.6	2.7-3.3

昼行灯 DRL

	A-2835D1W-S1-08-HR1-CZ	C2016F77W2CB (Ra1) -FC-LVR-CZQ	3433Y	AS-3528D34W-S1-08-PCT-CZ
Rated Current@ Recommend Power	0.15A@0.45W	0.5A@1.5W	0.14A@0.5W	0.15A@0.5W
Max Current@Max Power	0.17A@0.57W	0.7A@2W	0.15A@0.5W	0.18A@0.6W
Product Dimension(mm)	3.5*2.8*0.8	2.0*1.6*0.75	3.4*3.3*1.9	3.5*2.8*0.8
CCT(K)	4750-6500	5180-6680	5180-6680	5000-6000
Flux(lm)	57-67	220-260	20-35	60-68
Voltage(V)	2.8-3.4	2.8-3.3	2.8-3.3	2.8-3.4

仪表盘灯 Dashboard Lamp

	PC-3216H233W-CZ	PSC-2012H233W-CZ	PC-3216H203BC	PC-3216U51GC	PSC-2012S9AC-CZ
Rated Current@ Recommend Power	0.005A/0.015W	0.02A/0.06W	0.02A/0.06W	0.02A/0.06W	0.02A/0.06W
Max Current@Max Power	0.020A/0.06W	0.03A/0.09W	0.03A/0.09W	0.03A/0.09W	0.03A/0.09W
Product Dimension(mm)	3.2*1.6*0.68	2.0*1.25*0.68	3.2*1.6*0.68	3.2*1.6*0.68	2.0*1.25*0.68
CCT	6000-7000K	12000K	461-474nm	515-525nm	626-636nm
Flux(mcd)	270-460	780-1700	210-350	600-1000	90-200
Voltage(V)	2.8-3.4	2.8-3.4	2.8-3.4	2.8-3.4	2.8-3.4